


Low-Voltage Sprinkler Wire

60°C 30 Volts UL

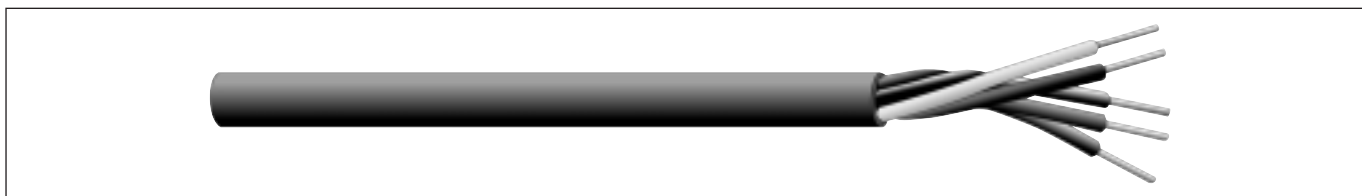

LOW VOLTAGE SPRINKLER WIRE - 30 VOLTS - UL

CATALOG NUMBER	NO. OF COND.	AWG SIZE	LENGTH OF CORD (FEET)	PACKAGE TYPE	POWER RATING ⁽¹⁾			PKG PER CTN.	APPROX. WEIGHT PER CTN (LBS) ⁽²⁾	CARTON DIMENSIONS (H x W x D)	UPC NUMBER
					VOLTS	AMPS	WATTS				
23824-60-01	4	18	100	Cuff	30	15	450	6	22	8.5 x 12.25 x 14	079407238248
23804-18-01	4	18	500	Spool	30	15	450	1	18	10.625 x 10.625 x 6.313	079407908047
23815-60-01	5	18	50	Cuff	30	15	450	6	13	8.5 x 12.25 x 14	079407238156
23825-60-01	5	18	100	Cuff	30	15	450	6	27	9.5 x 14 x 17	079407238255
23805-18-01	5	18	500	Spool	30	15	450	1	22	10.625 x 10.625 x 6.313	079407908054
23817-60-01	7	18	50	Cuff	30	15	450	6	18	8.5 x 12.25 x 14	079407238170
23827-60-01	7	18	100	Cuff	30	15	450	6	36	9.5 x 14 x 17	079407238279
23807-18-01	7	18	500	Spool	30	15	450	1	31	10.625 x 10.625 x 10.313	079407908078
23810-18-01	10	18	500	Reel	30	15	450	1	44	-	079407908108

⁽¹⁾ Amps and watts are offered ONLY as a guide to the end user

⁽²⁾ Actual shipping weight may vary.

Product Construction:

Conductor:

- 18 AWG fully annealed solid bare copper per ASTM B-3

Insulation:

- Premium grade color coded PVC
- Premium grade PE jacket, black
- Nylon rip cord to facilitate jacket removal
- Temperature Range: -20°C to +60°C
- Color Code: See chart below

Jacket Marking:

- CAROL (SIZE) 30V SPRINKLER SYSTEMS WIRE - DIRECT BURIAL E54567 (UL)

Applications:

- Low voltage golf course satellite sprinkler control
- Residential sprinkler solenoid control

Industry Approvals:

- UL Listed under a UL Miscellaneous Wire file
- UL Listed for outdoors applications
- UL Listed for direct burial applications

Packaging:

- See tabular data above
- Other put-ups available on special order

COLOR CODE CHART

1	Black	4	Green	7	Blue	10	Purple
2	White	5	Orange	8	Brown		
3	Red	6	Yellow	9	Gray		

**CAROL
BRAND**



General Cable